


ORDN QUICK REFERENCE GUIDE - Ver. 1.51

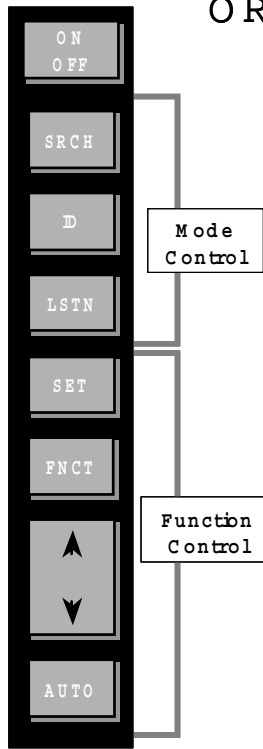

ON/OFF Functions

Tum Unit On	Single press of ON/OFF when off
Tum Unit Off	Press and hold ON/OFF
Volume Mute	Single press of ON/OFF to toggle on and off
Save Current Settings	Press FNCT, ON/OFF, ON/OFF, Hold SET 4 seconds

Modes


Mode Key	Smart Display	Description	Main Utility
SRCH*	Srch 2&3, Search CW, Srch Hop	Display 2&3 Harmonics, 3 freq opt: pulse, hop, cw	Detection and Discrimination
ID	ID FM 2, ID FM 3	Single Harmonic detection	Long Range Detection
LSTN	CW FM 2,3; CW AM 2,3; 20K AM 2,3	Listen for junction characteristics	Junction Evaluation & Discrimination

*Highly Recommended mode while using with SET TRF function

Functions - Use \checkmark & \wedge and AUTO keys to adjust.

Function	Access Key	Notes
Set Gain	SET	Controls Sensitivity, Range 1 to 6, Default= 2
Set Trip	SET	Provides Alert Tone. Press AUTO for automatic set.
Power	FNCT	Range 0 - 100% ; Default for \checkmark / \wedge buttons.
Volume	FNCT	Variable control, Mute using ON/OFF
Frequency	FNCT	USA 902.2 - 927.8 MHz, Export 880 - 1005 MHz
Extra Functions	ON/OFF, FNCT	Brightness control, Battery check
Remote Module	ON/OFF, SET	Selects Single or Dual display with RCM remote

ORDN QUICK REFERENCE GUIDE - Ver. 1.51

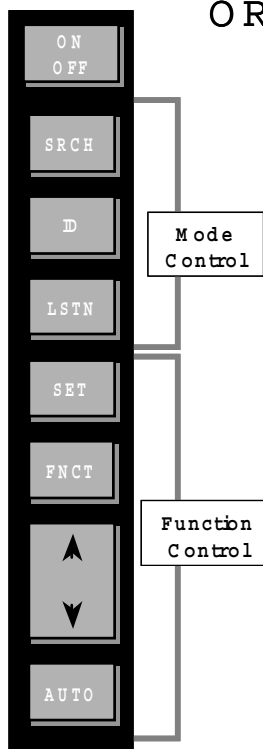

ON/OFF Functions

Tum Unit On	Single press of ON/OFF when off
Tum Unit Off	Press and hold ON/OFF
Volume Mute	Single press of ON/OFF to toggle on and off
Save Current Settings	Press FNCT, ON/OFF, ON/OFF, Hold SET 4 seconds

Modes

Mode Key	Smart Display	Description	Main Utility
SRCH*	Srch 2&3, Search CW, Srch Hop	Display 2&3 Harmonics, 3 freq opt: pulse, hop, cw	Detection and Discrimination
ID	ID FM 2, ID FM 3	Single Harmonic detection	Long Range Detection
LSTN	CW FM 2,3; CW AM 2,3; 20K AM 2,3	Listen for junction characteristics	Junction Evaluation & Discrimination

*Highly Recommended mode while using with SET TRF function

Functions - Use \checkmark & \wedge and AUTO keys to adjust.

Function	Access Key	Notes
Set Gain	SET	Controls Sensitivity, Range 1 to 6, Default= 2
Set Trip	SET	Provides Alert Tone. Press AUTO for automatic set.
Power	FNCT	Range 0 - 100% ; Default for \checkmark / \wedge buttons.
Volume	FNCT	Variable control, Mute using ON/OFF
Frequency	FNCT	USA 902.2 - 927.8 MHz, Export 880 - 1005 MHz
Extra Functions	ON/OFF, FNCT	Brightness control, Battery check
Remote Module	ON/OFF, SET	Selects Single or Dual display with RCM remote